CRA-1656SP

Ai-NET CD Shuttle Controller

FEATURES

CD Shuttle Control
Elapsed Time Display
Disc Title Memory
Music Sensor (Skip)
Music Scan
MIX (Random Play)
Repeat (One / All)

Ai-NET
Multi CD Shuttle Control*

General
BBE
Flush Mount Kit
Speaker Level Input
Dual PreOuts
Preamp Fader
Title Search Menu
Operation Indicator
Volume Control
Bass & Treble Controls
Fader & Balance Controls
Wireless Remote Control Included

*With optional KCA-400C



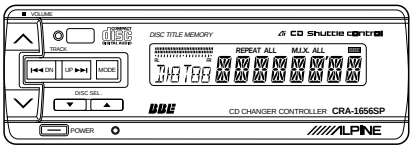



4i Processor | CD Shuttle Control Function | 2 pre-outs | BBE | Included

SPECIFICATIONS

CD Shuttle Controller
Pre Output Voltage (Before Clipping) ..... 2 volts
Input Impedance (Speaker) ..... 200 ohms
Input Voltage (Speaker Maximum) ..... 3.8V at 1000Hz
Bass Control Range ..... ±15dB at 30Hz
Treble Control Range ..... ±10dB at10kHz

Remote Control
Battery ..... 1 "CR 2025"
Dimensions (W x H x D) ..... 39mm x 6mm x 90mm (1-1 / 2"x1 / 4"x3-1 / 2")

General
Chassis Size (W x H x D) ..... 131mm x 35mm x 73mm (5-1 / 8"x1-3 / 8"x2-7 / 8")
Operating Temperature ..... 60°C (140°F) to -10°C (14°F)
Remote Display (W x H x D) ..... 113mm x 40mm x 20mm (4-7 / 16"x1-9 / 16"x3 / 4")
Remote Display Cable Length ..... 2m (6 ft)

Specifications and design are subject to change without notice

ALPINE

CRA-1656SP

Ai-NET CD Shuttle Controller